
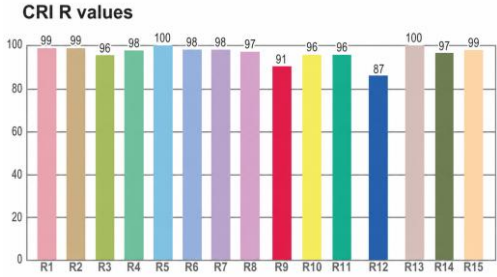


Luminaire Specification

Project Name		Project Number	
Issue Date		Revision	R0
		Prepared By	

ILLUSTRATION

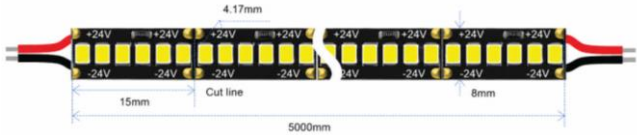

PRODUCT & MECHANICAL

Description	Surface mounted bare LED strip		
Fixture Type	LED strip	Installation Method	Surface mounted
Adjustability		Horizontal Rotation	
Vertical Adjustment		IP Rating	IP20
Materials	Flexible PCB	Finishes	Black PCB
Trim Info		Trim Finishes	
Reflector Finishes		Accessories	3M sticker at the back
Length (mm)	Max.5meter per reel	Width (mm)	8mm
Height (mm)	2.5mm	Ceiling Cut-out (mm)	

LIGHT SOURCE & OPTICAL

Wattage	4.8 / 9.6 / 14.4 W/m	Type of Light Source	SMD
CCT (K)	2700 / 3000 / 3500 / 4000K	Optical Distribution	120Degree
CRI	Ra≥90	Lumen Output (lm)	
Efficacy (lm/W)	110 lm/W	Binning	SDCM ≤2 · CCT ±50K
Lamp Base		Light Source Lifetime	>50,000 hrs (L70 B10)

ELECTRICAL & CONTROL

LED Driver	Constant Voltage	Electrical Output	DC24V
Driver Brand		Dimming Protocol	OnOff / DALI / Phase / 0-10V / DMX
Dimming Range		Control Gear Location	Remote

MANUFACTURER & SUPPLIER

Manufacturer	TapasNow	Product Code	See Below
Brand Origin	PRC	Supplier	
Contact		Telephone	
Email			

NOTES

Cut Length: 33.3mm
Cable Entry: Default Double Side Axial Entry
Cable Length: 200mm
Ambient temp : -20 °C to 45 °C

ST	-	XXX	-	XX	-	XXM
		048 = 4.8W/m		27 = 2700K		01 = 1meter
		096 = 9.6W/m		30 = 3000K		02 = 2meter
		144 = 14.4W/m		35 = 3500K		03 = 3meter
				40 = 4000K		04 = 4meter
						05 = 5meter