
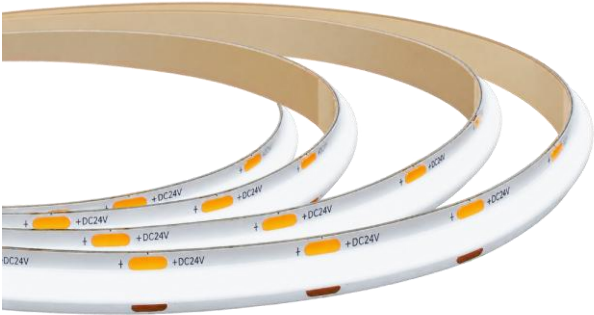
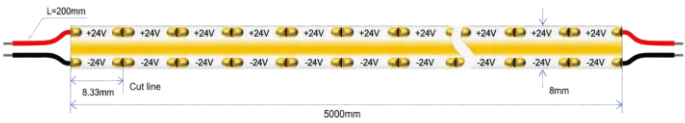


Luminaire Specification

Project Name		Project Number	
Issue Date		Revision	R0
		Prepared By	

ILLUSTRATION

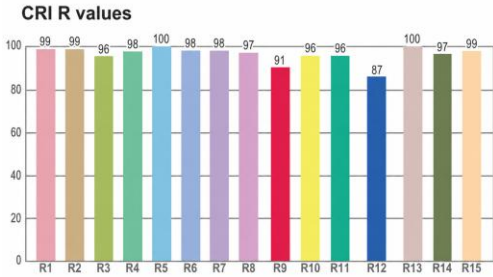

Color Temp	CRI R value
R1	99
R2	99
R3	96
R4	98
R5	100
R6	98
R7	98
R8	97
R9	91
R10	96
R11	96
R12	87
R13	100
R14	97
R15	99

PRODUCT & MECHANICAL

Description	Surface mounted COB LED strip		
Fixture Type	COB LED strip	Installation Method	Surface mounted
Adjustability		Horizontal Rotation	
Vertical Adjustment		IP Rating	IP20
Materials	Flexible PCB	Finishes	White PCB
Trim Info		Trim Finishes	
Reflector Finishes		Accessories	3M sticker at the back
Length (mm)	Max.5meter per reel	Width (mm)	8mm
Height (mm)	2.5mm	Ceiling Cut-out (mm)	

LIGHT SOURCE & OPTICAL

Wattage	10 W/m	Type of Light Source	COB
CCT (K)	2700 / 3000 / 3500 / 4000K	Optical Distribution	120Degree
CRI	Ra≥90	Lumen Output (lm)	
Efficacy (lm/W)	65 lm/W	Binning	SDCM ≤2 · CCT ±50K
Lamp Base		Light Source Lifetime	>50,000 hrs (L70 B10)

ELECTRICAL & CONTROL

LED Driver	Constant Voltage	Electrical Output	DC24V
Driver Brand		Dimming Protocol	OnOff / DALI / Phase / 0-10V / DMX
Dimming Range		Control Gear Location	Remote

MANUFACTURER & SUPPLIER

Manufacturer	TapasNow	Product Code	See Below
Brand Origin	PRC	Supplier	
Contact		Telephone	
Email			

NOTES

Cut Length: 8.33mm	COB	-	XXX	-	XX	-	XXM
Cable Entry: Default Double Side Axial Entry							
Cable Length: 200mm							
Ambient temp : -20 °C to 45 °C			100 = 10W/m		27 = 2700K		01 = 1meter
					30 = 3000K		02 = 2meter
					35 = 3500K		03 = 3meter
					40 = 4000K		04 = 4meter
							05 = 5meter